

CMD SOS/11.11	Shut Off Valve Type : SOS			Logo


Features :

- For subplate mounting
- Material Steel & SS

Symbol :

Space for 3-D view

Sectional view

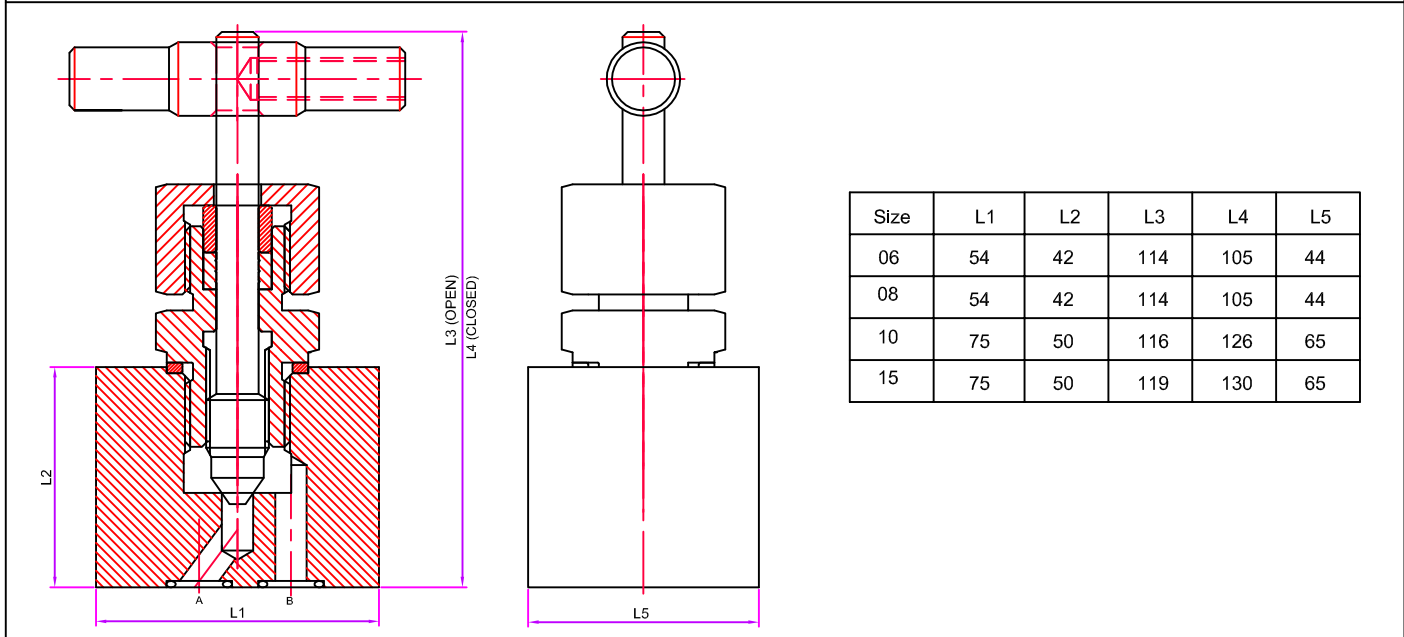


Ordering code

SOS		*
Shut Off Valve Subplate Mounting		Further details to specify
Nominal size 06	=06	
Nominal size 08	=08	
Nominal size 10	=10	
Nominal size 15	=15	

CMD SOS/11.11	Shut Off Valve Type : SOS			Logo

Mounting dimensions

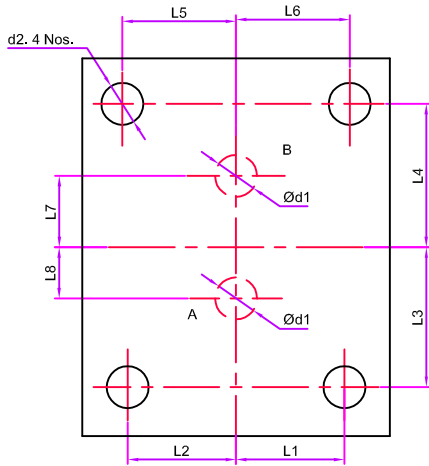

Size	L1	L2	L3	L4	L5	L6	L7	L8	Ød1	d2
06	15.5	15.5	20	20.5	16.25	16.25	10.2	7.3	Ø6	M5
08	15.5	15.5	20	20.5	16.25	16.25	10.2	7.3	Ø8	M5
10	23	23	27	27	23	23	14.2	10.8	Ø10	M8
15	23	23	27	27	23	23	20.2	10.8	Ø15	M8

Technical data (for special application, please contact us)

Mounting style	Subplate Mounting					
Maximum operating pressure	bar	315				
Maximum flow	Size	06	08	10	15	
	L/min.					
Pressure fluid	Mineral oil (HL,HLP) to DIN 51 524; Fast bio-degradable pressure fluids to VDMA 24 568;HTEG (rape seed oil); HEPG (polyglycol); HEES (synthetic ester); other fluids on request					
Pressure fluid - temperature range	°C	- 30 to + 80				
Viscosity range	mm ² /s	2.8 to 500				
Degree of contamination	Maximum permissible degree of contamination of the fluid is to NAS 1638 class 9.					
Weight	Size	06	08	10	15	
	Kg.	1	1	2.1	2.1	