CMD SV/11.11	Shuttle Valve type SV			LOGO
Replaces : STL 03.10	Size : 06	up to 315 bar	up to 18 L/min.	CM Hydro Systems Pvt Ltd

Fetaures :

- Port P connected to both A & B
- Isolates Port A & Port B from each other
- Available in subplate & threaded construction (see ordering code)

Symbols :





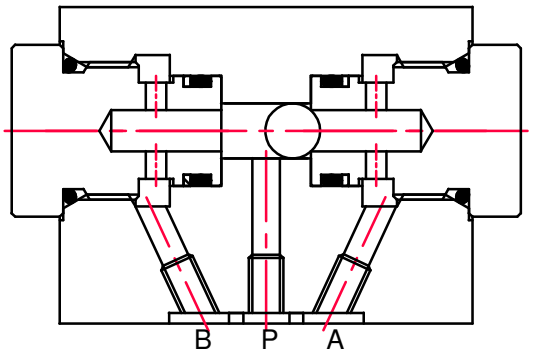

Mounting Dimensions

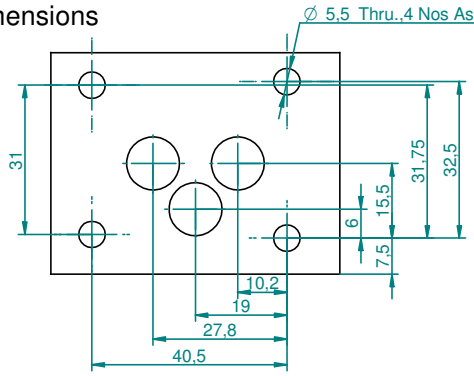

Ordering code

SV					*

Nominal size 06 =06

Subplate type =S

Further details to specify

Revision status index

Port Connection (for threaded)

1= 1/4" BSP

2= 3/8" BSP

Technical data (for other sizes and special application,please contact mktg@cmhydraulics.com)

Maxmium operating pressure	bar		315
Maxmium flow	Size		06
	L/min.		18
Pressure fluid			Mineral oil (HL,HLP) to DIN 51 524; Fast bio-degradable pressure fluids to VDMA 24 568;HTEG (rape seed oil); HEPG (polyglycol); HEES (synthetic ester); other fluids on request
Pressure fluid - temperature range	℃		- 30 to + 80
Viscosity range	mm^2/s		2.8 to 500
Degree of contamination			Maxmium premissible degree of contamination of the fluid is to NAS 1638 class 9.